

## GSR2650 LB Receiver Specifications

<b>Position Accuracy<sup>1</sup></b>		
<b>Single Point</b>		
L1	1.8 m CEP	
L1/L2	1.5 m CEP	
<b>WAAS/EGNOS</b>		
L1	1.2 m CEP	
L1/L2	0.8 m CEP	
<b>OmniSTAR<sup>2</sup></b>		
VBS	1.0 m CEP	
HP	10.0 cm CEP	
RTK <sup>3</sup>	10.0 mm + 1 ppm (horizontal)	20.0 mm + 1 ppm (vertical)
Kinematic, Stop-and-Go <sup>4</sup>	10.0 mm + 1 ppm (horizontal)	20.0 mm + 1 ppm (vertical)
<b>Channels</b>		
	12 x L1 and 12 x L2 with full code and carrier	
<b>Time to First Fix</b>		
Cold Start	50 sec	
Signal Reacquisition	0.5 sec L1; 1.0 sec L2	
Data Rate	20 Hz	
<b>Physical</b>		
Weight	1.1 kg	2.4 lb
Size (l x w x h)	18.0 cm x 15.4 cm x 7.1 cm	7.1 in x 6.1 in x 2.8 in
<b>Environmental</b>		
Operating Temperature	-40° C to +75° C	-40° F to +167° F
Storage Temperature	-40° C to +90° C	-40° F to +194° F
Water Resistance	IPX4, IPX7	
Shock <sup>5</sup>	1.0 m drop	3.3 ft drop
<b>Power Requirements</b>		
Power Input	+7 to +15 VDC	
Logging	5 W typical (operating)	
Batteries	2 x 2300 mAh camcorder batteries	
Operating Time	8 to 12 hours	
<b>External Ports</b>		
	3 x RS232, 1 x power, 1 x antenna	
<b>Standard Input / Output Formats</b>		
	RTCA, RTCM, CMR, NMEA-0183 out, PPS out, Mark In	
<b>SK-600 LB Antenna Specifications</b>		
Operating Temperature	-55° C to +85° C	-67° F to +185° F
Storage Temperature	-55° C to +85° C	-67° F to +185° F
Weight	0.7 kg	1.6 lb
Water Resistance	IPX7	
Shock and Vibration	MIL-STD-810F method 514.5, Salt Spray: MIL-STD-810F method 509.4	
Phase Center	L1 and L2 phase center in same location (zero offset)	
Multipath Performance	Choke ring-like performance. Pinwheel™ technology to provide exceptional multipath rejection.	
Ground Plane	Built-in	

1. Accuracy depends on the number of satellites used, obstructions, satellite geometry (DOP), occupation time, multipath effects, atmospheric conditions, baseline length, survey procedures and data quality.

2. Accuracies dependent on distance from OmniSTAR base station and if receiver is within coverage zone specified by OmniSTAR.

3. 1 Sigma.

4. 95% confidence level.

5. Shock specifications based on receiver without cables attached.

Design and specifications are subject to change without notice.

## SOKKIA Worldwide

SOKKIA CO., LTD. Head Office, Japan Phone +81-46-248-7984 www.sokkia.co.jp ISO9001 Certified (JQA-0557)

SOKKIA CORPORATION Head Office U.S.A. Phone +1-800-255-3913 www.sokkia.com

SOKKIA CORPORATION Head Office Canada Phone +1-905-238-5810 www.sokkiacanada.com

SOKKIA LATIN AMERICA Head Office Latin America Phone +1-305-599-4701 www.sokkialatinamerica.com

SOKKIA PTY. LTD. Head Office Australia, New Zealand and South Pacific Phone +61-2-9638-2400 www.sokkia.com.au

SOKKIA B.V. Head Office Europe & other CIS countries Phone +31-(0)36-5496000 www.sokkia.net

SOKKIA KOREA CO., LTD. Head Office Republic of Korea Phone +82-2-514-0491 www.sokkia.co.kr

SOKKIA SINGAPORE PTE. LTD. Head Office South & Southeast Asia, Middle East, and Africa Phone +65-6479-3966 www.sokkia.com.sg

SOKKIA SURVEYING INSTRUMENTS TRADING (SHANGHAI) CO., LTD. Shanghai Office, People's Republic of China Phone +86-21-63541844 www.sokkia.com.cn

SOKKIA SURVEYING INSTRUMENTS TRADING (SHANGHAI) CO., LTD. Beijing Office People's Republic of China Phone +86-10-65056066 www.sokkia.com.cn

POINT, Inc. — Integrated Measurement Solutions

©2007 POINT, Inc. SOKKIA is a trademark of SOKKIA Co. Ltd. All rights reserved. Microsoft Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries. Other trademarks and trade names are those of their respective owners.

**SOKKIA**

790-0-0062  
Printed In the U.S.A. — 3/07

**SOKKIA**

**GSR2650 LB**



**L1 / L2 GPS L-Band System**

HERITAGE | QUALITY | SUPPORT | VALUE


# GSR2650 LB

## L1 / L2 GPS L-Band System

The GSR2650 LB is a unique GPS system that offers the ability to perform GIS and RTK applications within one system. The receiver is capable of utilizing OmniSTAR HP, OmniSTAR VBS and WAAS corrections and can deliver centimeter-level results in RTK mode. The flexibility of the GSR2650 LB allows you to switch from GIS to RTK modes without having to switch equipment. The system, with its modular design, is extremely easy to set up and even easier to use and is durable enough to withstand even the harshest environments.



**Versatile. Reliable. Functional.**

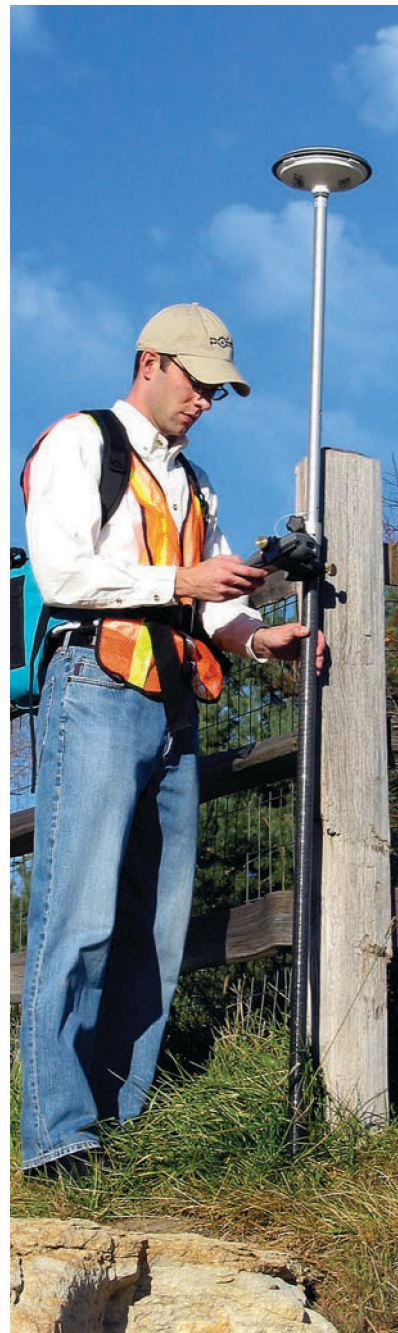

### GSR2650 LB Features

#### Versatile design.

- Perform GIS or RTK surveying applications without switching equipment
- Equipped to receive OmniSTAR HP, OmniSTAR VBS and WAAS corrections

#### Extremely accurate.

- Utilize OmniSTAR HP to achieve decimeter-level results as a stand-alone DGPS and centimeter-level results in RTK
- OmniSTAR VBS and WAAS/EGNOS deliver submeter accuracies for GIS applications

#### Rugged performance.

- Lightweight receiver is 1.1 kg (2.4 lb)
- Dustproof and waterproof
- Able to withstand a drop of 1.0 m (3.3 ft)

#### Advanced technology.

- Dual-frequency SK-600 LB antenna features Pinwheel™ Technology, which decreases errors associated with multipath and electromagnetic interference
- Exceptional positioning performance for outstanding efficiency

#### Easy to operate.

- Simple setup for base or rover operations
- Comes complete with camcorder batteries for 8-12 hours of continuous surveying



### GSR2650 LB System

- High-performance, dual-frequency GPS receiver
- SK-600 LB dual-frequency GPS antenna
- Microsoft Windows® CE data collector with IMap or SDR Level 5 software
- Ergonomic backpack



### Data Collection

#### SDR Level 5 data collection software.

- Workflow is designed to follow a logical field collection process
- Offers topographic surveying, stakeout, roading and coordinate geometry (COGO)
- Processes a wide range of GPS and Total Station sensors
- Runs on multiple platforms, including Allegro CX™

#### IMap data collection software.

- Provides comprehensive GIS mapping tools
- Simple interface and intuitive workflow
- Offers up-to-the-second positional information
- Easy-to-interpret graphical displays



### The SOKKIA Difference

SOKKIA has been developing advanced products for surveying professionals around the world since 1920. We are very proud of our **heritage**. It is our mission to provide you with products of the highest **quality** so you can do the job right the first time – every time. And we **support** our products long after the sale is complete. With that kind of **value**, it is no wonder surveyors everywhere count on SOKKIA for their most important projects.